IP65 IK10 CE

Specifications

Model	HBGLM-MXHB100	HBGLM-MXHB150	HBGLM-MXHB200
Power Consumption	100W±5%	150W±5%	200W±5%
LED Type	PHILIPS 3030		
Luminous Flux	15000	22500	30000
Luminous Efficiency	150 LM/W		
CCT	3000K, 4000K, 5000K , 6000K		
Color Rendering Index	Ra＞70		
UGR	UGR 16		
Input Voltage	100-277 V / 277-480 V		
Lumen Maintenance	70%(50000Hrs)		
Product Dimension	ϕ249*178.32mm	ϕ299.29*181.32mm	ϕ345.15*183.32mm
Net Weight	2.25kg	3.1kg	3.65kg
Export Carton Size	L320*W320*H165mm	L355*W350*H165mm	L410*W410*H175mm
Gross Weight	2.83kg	3.85kg	4.55kg
Operating Temperature	-35℃ ～ +55℃		
Fixture Color	black		
IP Rating	IP65		
Warranty	5 Years		

Photometric

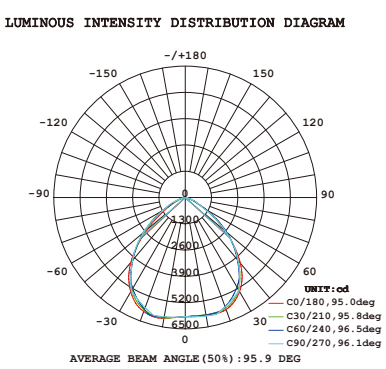

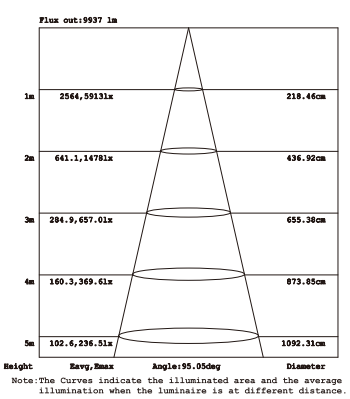

Description

- Cost-effective solid state solution for highbay applications providing one-for-one replacement of high-wattage fixtures.
- 150LM/W ultra-high efficiency delivers superior performance over legacy highbays.

Listings

- DLC ETL UL listed.
- IP65 Rated-Protected form total dust ingress.
- protected fron low-pressure water jets from any direction.

Applications

- Lightweight constucti on allows for quick and easy installation
- Aluminum alloy heatsink for cooleroperation temperatures
- -35℃~ +55℃ operation temperature
- -20℃~ +70℃ storage temperature

Applications

- Warehouses
- Gymnasiums
- Cold Storage
- Grocery Stores
- Big Box Retail
- Distribution Centers
- Manufacturing Plants
- Service Repail Centers

Dimensions

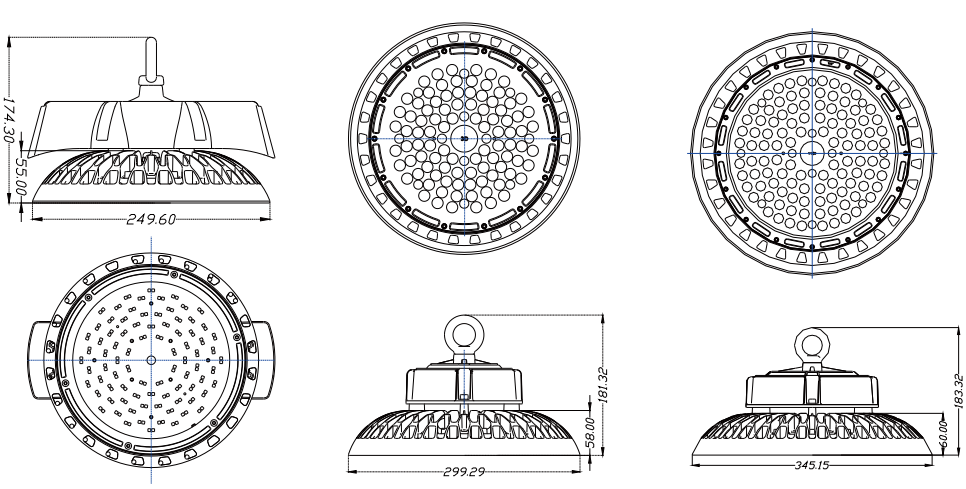

100W 150W 200W