



LED Ceiling Light

DOR/DOS IP54


/ 3 Generation



IP 54

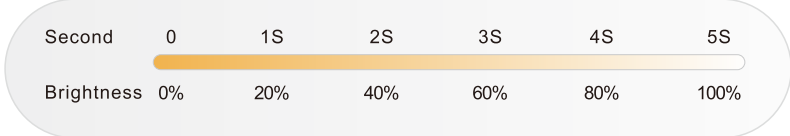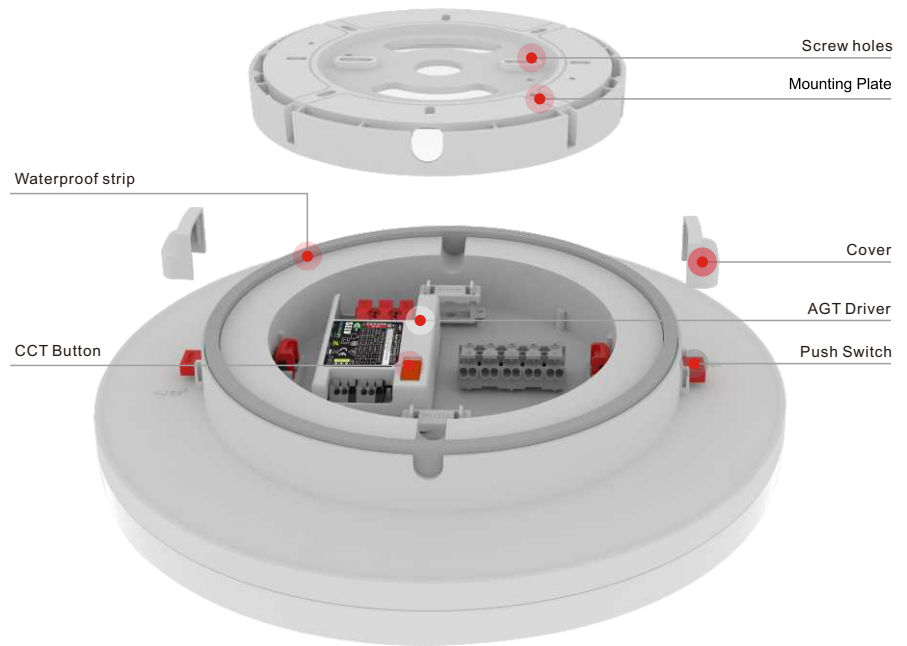

MOUNTING OPTIONS

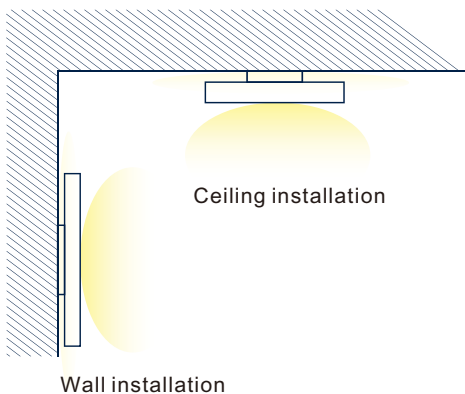

TCI DALI

- 1.CCT and Power Tunable
- 2.DALI,Sensor,Emergency for option
- 3.Both sides AC input,indirect light is available
- 4.Driver outside, PCBA could be replaceable
- 5.Unique design, easy installation

APPLICATIONS



LED Ceiling Light / TCI DALI




DOR/DOS IP54



TCL DALI Type



MINI JOLLY DALI 20

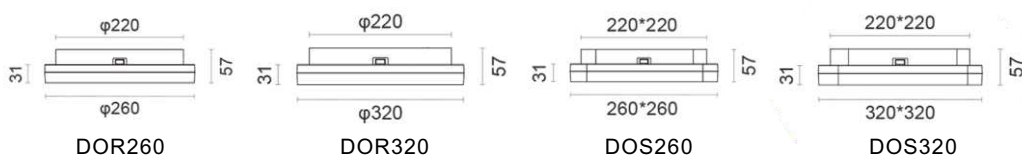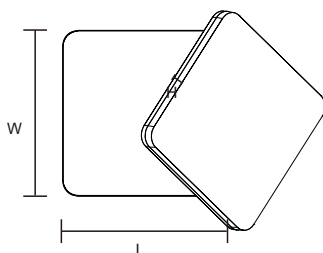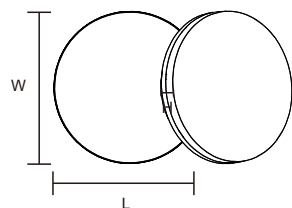

Model:	GLM-DOR260D	GLM-DOR320D	GLM-DOS260D	GLM-DOS320D
Power:	10/15/20W	15/20/25W	10/15/20W	15/20/25W
Size:	φ260*H57mm	φ320*H57mm	L260*W260*H57mm	L320*W320*H57mm
CCT:	3000/4000/6000K	3000/4000/6000K	3000/4000/6000K	3000/4000/6000K
CRI:	80/90/95	80/90/95	80/90/95	80/90/95
Lumens Output:	1200/1800/2400LM	1800/2400/3000LM	1200/1800/2400LM	1800/2400/3000LM
LED:	SMD2835	SMD2835	SMD2835	SMD2835
Number of LED:	576	864	576	816
Dimming:	CCT+Power/Switchable	CCT+Power/Switchable	CCT+Power/Switchable	CCT+Power/Switchable
Fire-proof level:	V0	V0	V0	V0
AC Input:	AC200-240V	AC200-240V	AC200-240V	AC200-240V
Working TP:	-20°~+50°	-20°~+50°	-20°~+50°	-20°~+50°
IP Level:	IP54	IP54	IP54	IP54
SDCM:	<3	<3	<3	<3
Beam Angle:	150°	150°	150°	150°
Lifespan:	50,000Hrs	50,000Hrs	50,000Hrs	50,000Hrs
Certification:	ENEC,TUV-GS,CE,ROHS	ENEC,TUV-GS,CE,ROHS	ENEC,TUV-GS,CE,ROHS	ENEC,TUV-GS,CE,ROHS
Material:	PC	PC	PC	PC
Installation options:	Wall , Ceiling , Pendant	Wall , Ceiling , Pendant	Wall , Ceiling , Pendant	Wall , Ceiling , Pendant
Slow-starting Time:	5s	5s	5s	5s
Warranty:	5Years	5Years	5Years	5Years