


Product Data Sheet


GLMPLS128CR

120
LM/W

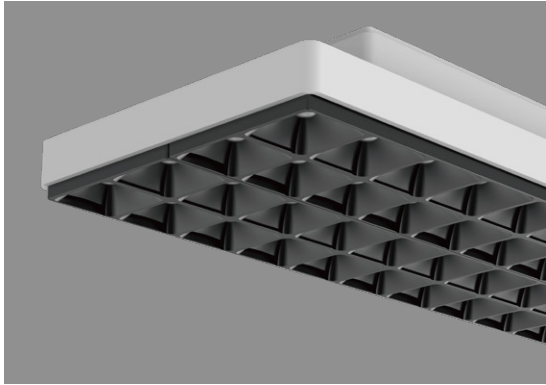

Products And Data


Model NO	GLM-PLS128CR
Size	L1155*W130*H41
Power	28/35/40W
CCT	3/4/6000K
CRI	>90
Lumens Output	3400/4200/1800LM
Driver	Tridonic
Electric current	900mA/1000mA/1050mA
AC Input	AC 200-240V
Working Tp	-20 C--+45 C
IP Level	IP54
SDCM	<3
Beam Angle	60°
UGR	<16
Housing Color	White/Black
Lifespan	Life of 50000 hours

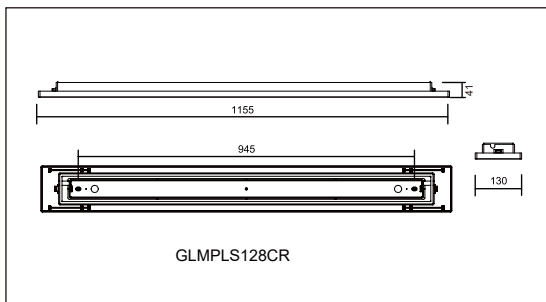


Features

- Modular Product Design, Exquisite appearance
- Easy to install.
- Lumileds 3030 LED, Tridonic driver inside
- 120lm/w, SDCM<3, PC material, V0, IK10.
- Color Temp: 3000/4000/6000K
- Beam angle: 60°
- UGR<16


Installation Options

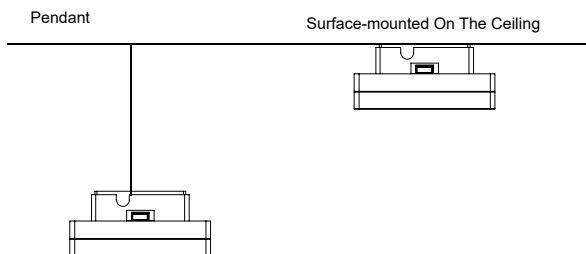

Accessories For Pendant




5.8G Modular Box



Grouping Synchronize Function Remote Controller

Version	Item No.	Function Options	Driver	Working Current	Lumens Output
Electrical Box	GLM-PLS01B	ON/OFF	TRIDONIC	250/300/350mA	28/35/40W Switchable
	GLM-PLS02D	DALI	TRIDONIC	250/300/350mA	28/35/40W Switchable
	GLM-PLS03S	5.8G SENSOR	Philips	250/300/350mA	28/35/40W Switchable
	GLM-PLS04P	Indirect suspension	TRIDONIC	250/300/350mA	28/35/40W Switchable
	GLM-PLS05T	Track	TRIDONIC	900/1000/1050mA	34/38/40W Switchable

Spectrogram

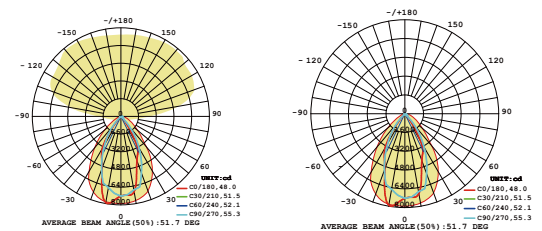

Scene



Accessories Set Must Be Ordered Separately

Type	Item No.	Description
Mounting parts	GLM-PARTS-PLS001	PLS128 install lifting ropes 2 sets
5.8G modular Dip	GLM-PARTS-PLS002	PLS128 5.8G sensor modular with Dip
5.8G modular Grouping	GLM-PARTS-PLS003	PLS128 5.8G sensor modular with Grouping Synchronize Function
Remote controller	GLM-PARTS-PLS004	PLS128 5.8G sensor modular with Grouping Synchronize Function Remote controller



Shenzhen Gleamia Lighting

Tel: +86-755-89589529 Fax: +86-755-89507460 Email: mark@gleamia.net Web: www.gleamia.net
 Add: 2nd Floor, Block C, Building 1, Hisense Science & Technology Park, Longgang, Shenzhen, China