
Mounting instructions



LED Track light

PLS128 down light and spot light for track



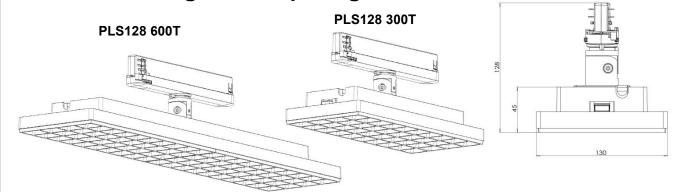






IP20



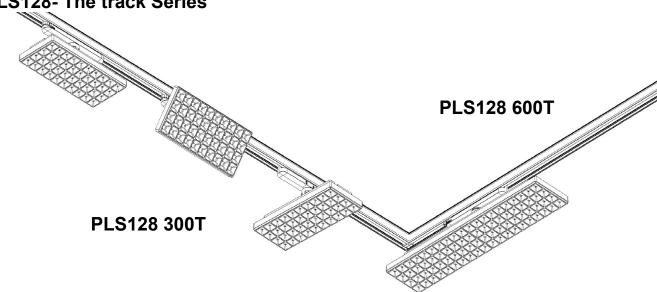

WARNING:



Check that the power is off before conducting any maintenance and assembly work



Caution,danger of electric shock



The installation and commissioning of the luminaire as well as any modification to the luminaire may only be performed by authorized personnel (qualified electrician).

PLS128 electrical box install drawing(Ceiling&pendant) Power Conductor Cross-Section: 4,0mm2 Surface 1-phase, 3-circuit Supply 230 V AC, 16 A, 3.7 kVA Track (1) Max. 16 A N-conductor I = max. 16 A Polarity 230/400 V AC, 16 A, 3 x 3.7 kVA $_{\text{Track}}$ 3-phase, 3-circuit Supply Ridge 31,5 mm Recessed 0-L1+L2+L3:I = max. 16 A 230/400 V AC, 16 A, 11.1 kVA Track 3-phase, 3-phase Supply (1) Max. 16 A Polarity Ridge N-conductor I = max. 16 A 31,5 mm

56 mm

