





Super High Lumen Back-Lit Panel Light

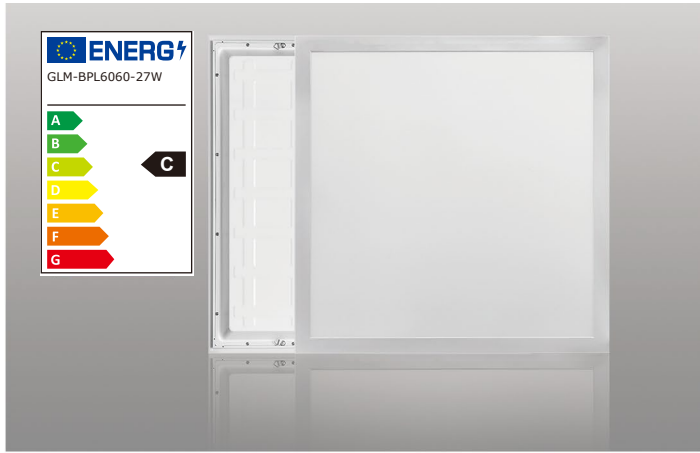

HOT
180LM/W

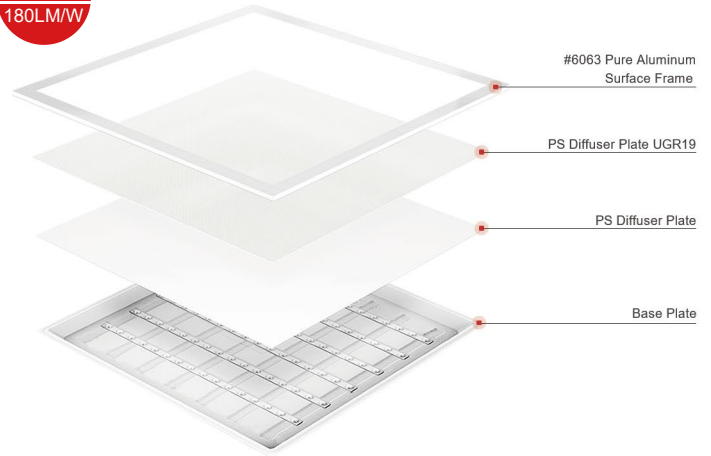

RoHS



Description


- EPREL2.0, Energy Efficiency Class="C"
- 3000K/4000K/6000K
- Driver: LiFud
- Long Lifespan: Never Turn Yellow, 5-7 Years Warranty
- High Strength Aluminum Alloy Frame, more Stronger
- High Luminous Efficiency-up To 180lm/w And Ugr<19



Photoelectric

Model Number	Dimension	Power	Electric Current	Input	Luminous Efficiency	Lumens Output	Ra	UGR
GLM-BPL6060-27W	595*595*34mm	27W	750mA	AC220-240V	180LM/W	4860LM	80/90	<19
GLM-BPL6262-27W	620*620*34mm	27W	750mA	AC220-240V	180LM/W	4860LM	80/90	<19
GLM-BPL12030-27W	1195*295*34mm	27W	750mA	AC220-240V	180LM/W	4860LM	80/90	<19
GLM-BPL12060-27W	1195*595*34mm	40W	1000mA	AC220-240V	180LM/W	7200LM	80/90	<19

Dimension

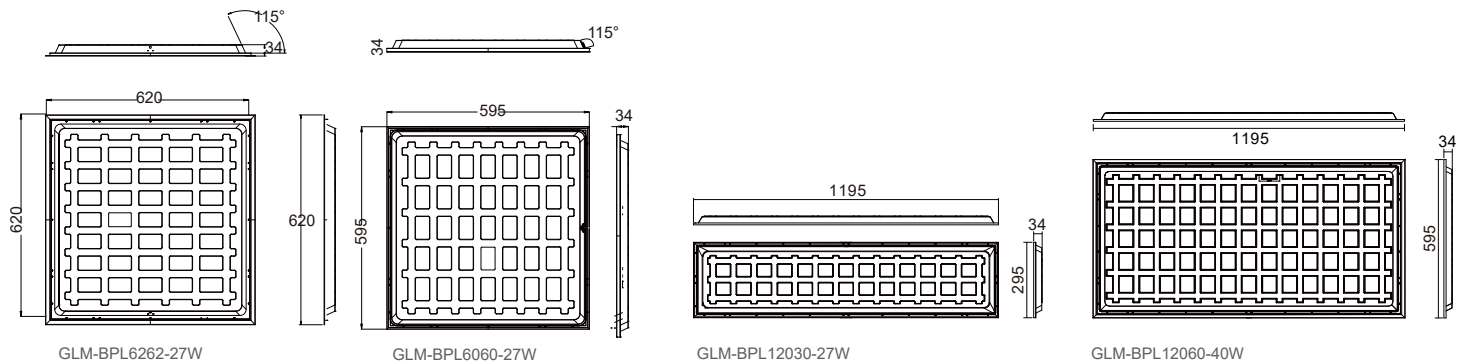

Electrical Driver

Input	AC220-240V
Frequency	50Hz
Output Voltage	DC33-38V
Relevant	EN55015/EN550221/EC61347-1
Power Factor	>0.95
THD	<15%
Power Efficiency	93%
Power Brand	LiFud
Protection	Surge/Short Circuit/Over Voltage/Over Current/OverTemp
MTBF	Minimum MTBF 50000 hoursat 100% load & 40° C

Driver


Features

- Super efficiency-efficiency greater than 93%
- No stroboscopic, high PF
- Suitable for Class II lamps
- Five-year warranty(refer to warranty instructions)



Product Description

SanAn chips and Lens
sanan chips use pure gold wire and pure copper bracket, with more stable heat dissipation. The uniform light distribution makes the LED with larger heat dissipation area, and lifespan is up to 7 years.
The lens is made form acrylic material,which makes the light more uniformand soft.



Isolated Driver
LiFud Flicker Free
high efficiency,PF>0.95 ,THD<15%
5 years warranty.

Back board
The back board is made of steel,which will absorb a large portion of heat created by the leds,film laminated surface helps it tobe insulated from current,safe for use.



Packing List

Model Number	Outer Carton(L*W*H)	Q'TY/CTN	G.W/CTN	Qty/40GP
GLM-BPL6060-27W	660*260*670mm	6PCS	12.7kg	3500PCS
GLM-BPL6262-27W	680*260*690mm	6PCS	13.6kg	3500PCS

Installation

