


Ceiling ,Wall And Pendant Luminaires

GLM-DOS620

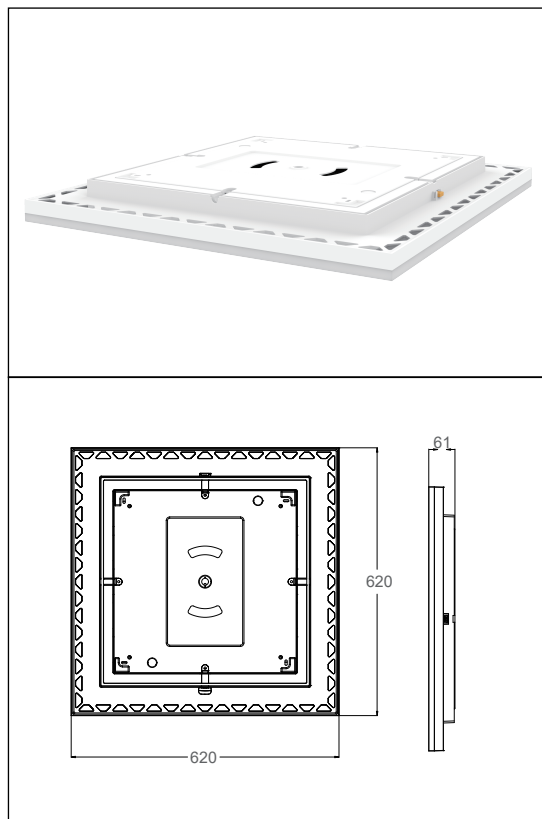


Description

- ceiling lights Polycarbonate lampshade, white.
- Simple Luminaire mounting adapter on the wall or ceiling.
- Two-sided fast shutter For tool-less lighting housings Mounted on the adapter. Good heat dissipation.
- color temperature 3000, The 4000 or 6000K can be turned on with a slide switch.
- The back of the lamp - before installation - adjustable.
- Adjustable 28watts, 34watts or 40 watts.
- 3360 -4800lm depends on color temperature and performance.
- Dimensions: 620*620*61mm
- Impact strength IK10, protection class IP54, protection grade
- Product life 50,000 h (L80 | B10).
- CE marking. ENEC Certification.


Product Features

Model	GLM-DOS620
Size	620*620*61mm
Input Power	28/34/40W Switchable
Current	250/300/350mA
lumen Efficiency	120LM/W
Lumens Output	3360/4080/4800LM
CCT	3/4/6000K Switchable
AC Input	AC200-240V
DC Input	50-114V
LED	SMD2835
LED Quantity	320pcs+LENS
Driver	Tridnoic
Ra	>90
SDCM	<4
Beam Angle	150°↓ 110°↑
Frequency	50/60Hz
Power Factor	>0.9
Materia	PC+ABS
IK Level	IK10
Protection Level	IP54
Package size	L650xW370xH650mm
QTY/Carton	5pcs
Lifespan	50,000HS
Certificate	ENEC/CE/ROHS 680 C
Operating Temperature	-20°C-45°C

Light Distribution

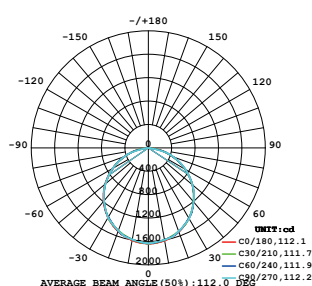

Energy Efficiency Rating

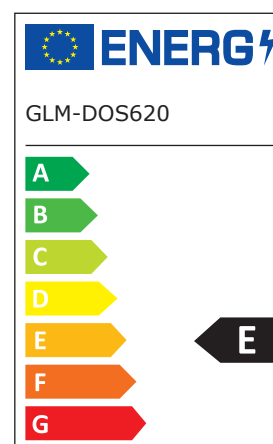

Shenzhen Gleamia Lighting

☎ Tel: +86-755-89589529 ☎ Fax: +86-755-89507460 ✉ Email: mark@gleamia.net 🌐 Web: www.gleamia.net
 📍 Add: 2nd Floor, Block C, Building 1, Hisense Science & Technology Park, Longgang, Shenzhen, China