


LED Ceiling Light

GLM-PLS128C300

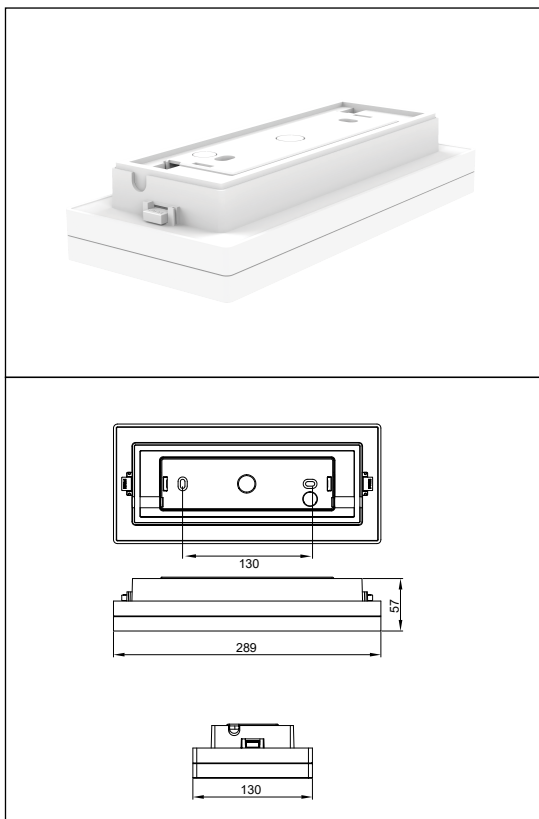

Description

- Strip LED wall and ceiling lights with polycarbonate lampshades, white
- Low glare, sufficient light
- A simple lamp installation adapter can be installed on walls or ceilings
- Double sided fast shutter, suitable for tool free illumination housing Install on adapter
- The accessories are safe. LED-SMD technology on metal core This board has good heat dissipation performance.
- 90 color reproduction.
- Adjustable 10W, 15W, or 20W.LM depends on color temperature power.
- Size: L289 * W130 * H57mm
- Impact strength IK10, protection level IP54.
- The service life of this product is 50000 hours (L80 | B10).
- CE mark. ENEC certification.
- Standard: EN 60598-1.


Product Features

Model	GLM-PLS128C300
Size	L289*W130*H57mm
AC Input	AC220-240V
Input Power	10W-15W-20W
Current	140mA-200mA-280mA
Lumens Output	1100Lm-1650Lm-2200Lm
CCT	3/4/6000K
lumen Efficiency	110LM/W
LED	SMD2835
Number of LED	336
Driver	AGT
Ra	80/90
SDCM	<4
Frequency	50/60Hz
Output Voltage	DC60-72V
Power Factor	>0.9
THD	<20%
Power Efficiency	>86%
Operating Temperature	-20°C-45°C
Storage Temperature	-20°C-60°C
Operating Humidity	90%Rh or below(@-20°C-40°C)
Application Area	Indoors
Lifespan	50,000HS
Relevant	EN55015,EN61347-1




Model NO	GLM-PLS-EL300
Size	Electrical box--- Tridonic Driver

Light Distribution

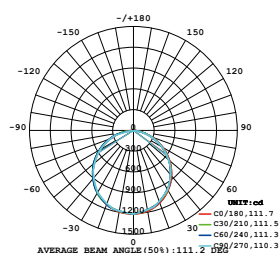

Energy Efficiency Rating

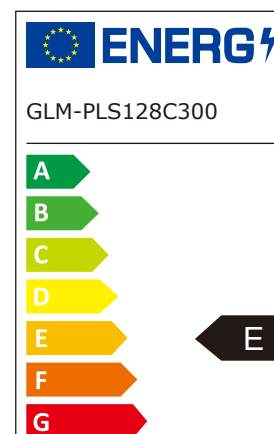

Shenzhen Gleamia Lighting

☎ Tel:+86-755-89589529 ☎ Fax:+86-755-89507460 ✉ Email:mark@gleamia.net 🌐 Web:www.gleamia.net
 📍 Add:2nd Floor,Block C,Building 1,Hisense Science & Technology Park,Longgang, Shenzhen,China