


LED Ceiling Light

GLM-PLS128C600

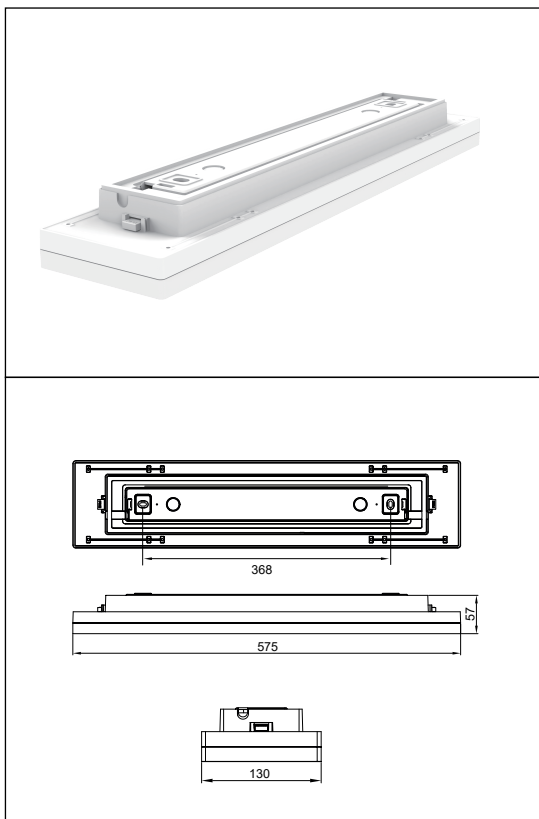

Description

- Strip LED wall light and ceiling light polycarbonate lampshade, white
- Low glare and sufficient light.
- A simple lamp installation adapter can be installed on walls or ceilings.
- Double sided fast shutter, used for tool free lighting housings installed on adapters.
- LED-SMD technology on metal core Good heat dissipation and color temperature of 3000K, 4000K or 6000K You can use the sliding switch to turn on the backlight, which can be adjusted before Installation.
- Ra 90 color reproduction.
- Adjustable 24W, 29W, and 35W.
- 2640-3850lm depends on color temperature power
- Dimensions: Length 575 * mm 130 * mm* 57mm
- Impact strength IK10, protection level IP54.
- The service life of this product is 50000 hours (L80 | B10)
- CE mark ENEC certification.
- Standard: EN 60598-1.


Product Features

Model	GLM-PLS128C600
Size	L575*W130*H57mm
AC Input	AC220-240V
Input Power	24W-29W-35W
Current	200mA-250mA-300mA
Lumens Output	2640Lm-/3190Lm/3850Lm
CCT	3/4/6000K
lumen Efficiency	110LM/W
LED	SMD2835
Number of LED	640
Driver	TRIDONIC
Ra	80/90
SDCM	<3
Frequency	50/60Hz
Output Voltage	DC50-133V
Power Factor	>0.9
THD	<20%
Power Efficiency	>90%
Operating Temperature	-20°C-45°C
Storage Temperature	-20°C-60°C
Operating Humidity	90%Rh or below(@-20°C-40°C)
Application Area	Indoors
Lifespan	50,000HS
Relevant	EN55015,EN61347-1




Mode NO	GLM-PLS-EL600	GLM-PLS-EL600DA	GLM-PLS-EL600S
Size	Electrical box Tridonic Driver	Electrical box BOKE DALI Driver	Philips Driver+ Sensor box

Light Distribution

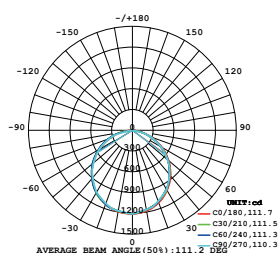

Energy Efficiency Rating

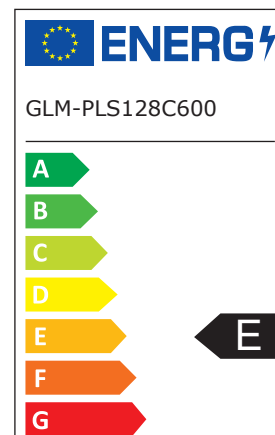

Shenzhen Gleamia Lighting

☎ Tel: +86-755-89589529 ☎ Fax: +86-755-89507460 ✉ Email: mark@gleamia.net 🌐 Web: www.gleamia.net
 📍 Add: 2nd Floor, Block C, Building 1, Hisense Science & Technology Park, Longgang, Shenzhen, China