


LED Spot Light

-355 ° Rotatable

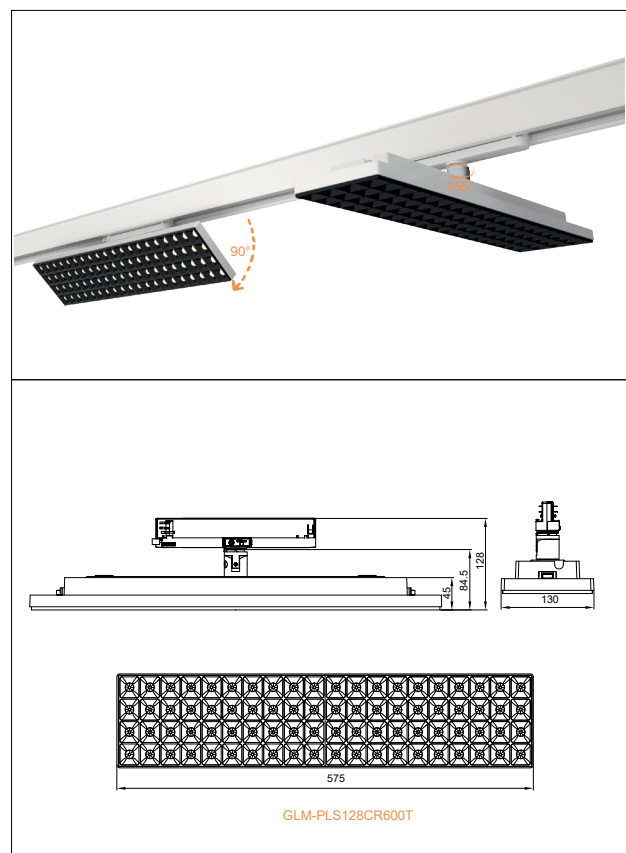


Description

- Lamp Body: LED Spotlight -355° Rotatable, Multifunctional Design
- Lamp Housing: Made Of Polycarbonate, White With Opalescent Diffuser For Uniform-Illumination Without Glare.
- Led: SMD Technology, Mounted On A Metal Core Circuit Board For Good Heat Dissipation.
- Color Temperature: 3000K or 4000K or 6000K fixed.
- Color Rendering Ra 90.
- Wattage:27W/29W/31W.
- Luminous flux 2970-3410 lm (depending on color temperature and power).
- Dimensions:L575mm,W130mm, H128mm.
- Protection Class IP20,
- Protection Class II, Product Life 50,000 Hours (L80 |B10), CE Marking.
- Conformity: EN 60598-1


Product Features

Model	GLM-PLS128CR600T
Materials	PC+Aluminum
Size	L575*W130*H128mm
AC Input	AC220-240V
Input Power	27W-29W-31W
Electric Current	700mA-750mA-800mA
Output Lumens	2970Lm-3190Lm-3410Lm
Color Temperature	3000K or 4000K or 6000K
Light Effect	110LM/W
LED	SMD3030
Number of LED	80
Driver	TRIDONIC
Ra	80/90
Protection Class	IP20
Color	White/Black
SDCM	<3
Frequency	50/60Hz
Output Voltage	DC24-42V
Power Factor	>0.9
THD	<15%
Power Efficiency	>87%
Operation Temperature	-20°C-45°C
Storage Temperature	-20°C-60°C
Working Humidity	90%Rh or below(@-20°C-40°C)
Application Areas	Indoors
Useful Life	50.000HS

Light Distribution



Energy Efficiency Class

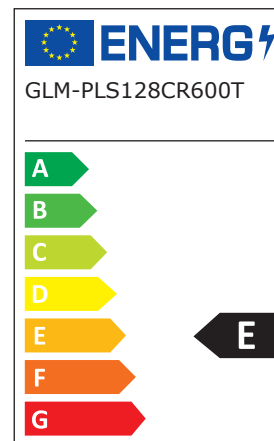

Shenzhen Gleamia Lighting

Tel:+86-755-89589529 Fax:+86-755-89507460 Email: mark@gleamia.net Web:www.gleamia.net
Add:2nd Floor,Block C,Building 1,Hisense Science & Technology Park,Longgang, Shenzhen,China