

LED Ceiling Light

GLM-PLS128CR600

Product Features

Model	GLM-PLS128CR600
Size	L575*W130*H47mm
AC Input	AC220-240V
Input Power	25W-31W-38W
Current	200mA-250mA-300mA
Lumens Output	3000Lm-3720Lm-4560Lm
CCT	3/4/6000K
lumen Efficiency	120LM/W
LED	SMD2835
Number of LED	160
Driver	TRIDONIC
Ra	80/90
SDCM	<3
Frequency	50/60Hz
Output Voltage	DC50-133V
Power Factor	>0.9
THD	<20%
Power Efficiency	>90%
Operating Temperature	-20°C-45°C
Storage Temperature	-20°C-60°C
Operating Humidity	90%Rh or below(@-20°C-40°C)
Application Area	Indoors
Lifespan	50,000HS
Relevant	EN55015,EN61347-1


Description

- Strip LED wall lights and ceiling lights with polycarbonate lampshades, reflective cups, and ample light.
- A simple lamp installation adapter can be installed on walls or ceilings.
- Double sided fast shutter, used for tool free illumination housing installation on adapter.
- LED-SMD technology on metal core. This board has good heat dissipation performance
- The color temperature is 3000. 4000 or 6000K can open the adjustable taillights before installation by sliding the switch.
- Ra 90 color reproduction.
- Adjustable: 25W31W38W
- 3000-4560lm, Depends on color temperature power.
- Dimensions: L575*W130*H47mm
- Impact strength IK10, protection level IP54.
- The service life of this product is 50000 hours (L80 | B10)
- CE mark ENEC certification.
- Standards: EN 60598-1, EN 60598.




Model NO	GLM-PLS-EL600	GLM-PLS-EL600DA	GLM-PLS-EL600S
Size	Electrical box Tridonic Driver	Electrical box BOKE DALI Driver	Philips Driver+ Sensor box

Light Distribution



Energy Efficiency Rating

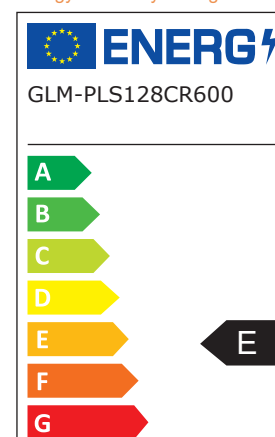

Shenzhen Gleamia Lighting

☎ Tel: +86-755-89589529 ☎ Fax: +86-755-89507460 ✉ Email: mark@gleamia.net 🌐 Web: www.gleamia.net
 📍 Add: 2nd Floor, Block C, Building 1, Hisense Science & Technology Park, Longgang, Shenzhen, China