

LED Ceiling Light

GLM-PLS128CR600

Produktmerkmale

Modle NO	GLM-PLS128CR600
Size	L575*W130*H47mm
AC Input	AC220-240V
Input Power	24W-30W-36W
Current	200mA-250mA-300mA
Lumens Output	2880Lm-3600Lm-4320Lm
CCT	3/4/6000K
lumen Efficiency	120LM/W
LED	SMD3030(Two-Tone)
Number of LED	80
Driver	TRIDONIC
Ra	80/90
SDCM	<3
Frequency	50/60Hz
Output Voltage	DC50-133V
Power Factor	>0.9
THD	<20%
Power Efficiency	>90%
Operating Temperature	-20°C-45°C
Storage Temperature	-20°C-60°C
Operating Humidity	90%Rh or below(@-20°C-40°C)
Application Area	Indoors
Lifespan	50,000HS
Relevant	EN55015,EN61347-1


Description

- Strip LED wall and ceiling lights polycarbonate lampshade, whiteit is low glare, adequate The light.
 - A simple Anbaumontage lamp mounting adapter can be installed inA wall or ceiling.
 - Double-sided fast shutter for tool-free lighting enclosuresInstall on the adapter.
 - LED-SMD technology on metal cores
 - The board has good heat dissipation and a color temperature of 3000The 4000 or 6000K can be turned on with a sliding switch on the backLights are adjustable before installation.
 - Ra 90 color reproduction.
 - Pressing type terminal block,Adjustable 24W, 30W or 36W
- The luminous flux of 2880-4320lm depends on the color temperature power.
- Size:L575*W130*H47mm
- Impact strength IK10 IP54.
 - This product has a service life of 50,000 hours (L80|B10).
 - CE mark. ENEC certification.Standard: EN 60598-1.EN 60598




Modle NO	GLM-PLS-EL600	GLM-PLS-EL600DA	GLM-PLS-EL600S
Size	Electrical box Tridonic Driver	Electrical box BOKE DALI Driver	Philips Driver+ Sensor box

Light Distribution



Energy Efficiency Rating

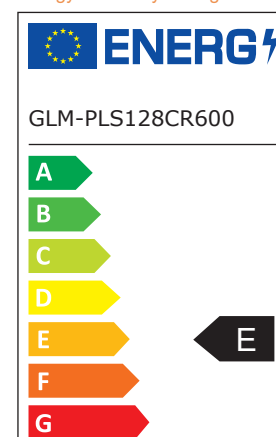

Shenzhen Gleamia Lighting

☎ Tel: +86-755-89589529 ☎ Fax: +86-755-89507460 ☎ Email: mark@gleamia.net ☎ Web: www.gleamia.net
 ☎ Add: 2nd Floor, Block C, Building 1, Hisense Science & Technology Park, Longgang, Shenzhen, China