


LED Ceiling Light

GLM-PLS128CR1500

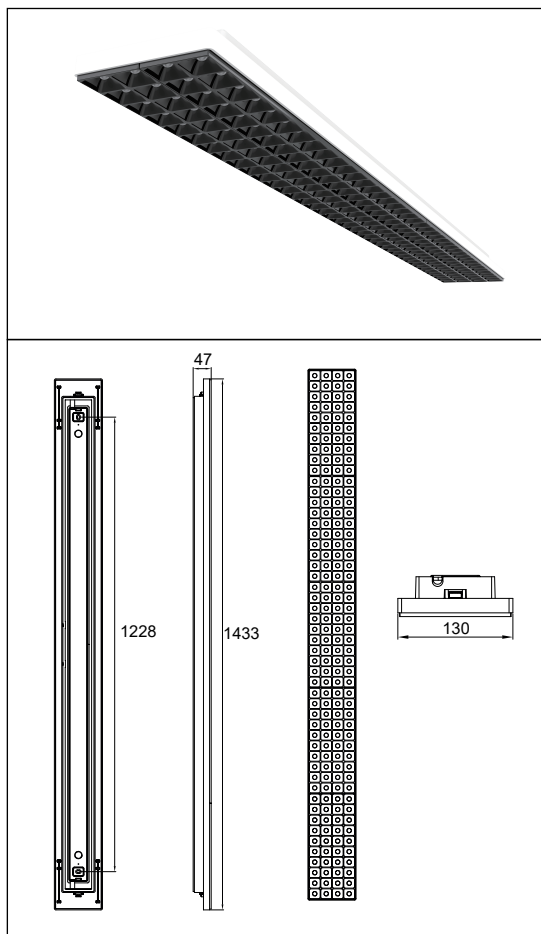

Description

- LED wall and ceiling lights with polycarbonate light shields and reflective cups,
 - A simple installation adapter for installing lights can be installed on walls or ceilings.
 - Double sided shutter, used for installing toolless lighting housings on adapters.
 - This board adopts metal core LED SMD technology with good performance
 - Heat dissipation and color temperature adjustable from 3000 to 4000 or 6000K
- Before installation, the sliding switch on the rear light is adjustable.

-Ra 90

-Press type terminal, adjustable 37W, 44W or 52W, luminous flux 5180-7280lm

It depends on color temperature and power.

Size: L1433 * W130 * H47mm

Impact resistance strength LK10, protection level IP54.

-The service life of this product is 50000 hours (L80B10)

-CE mark, ENEC certification.

Standard: EN 60598-1, EN 60598


Produktmerkmale

Modle NO	GLM-PLS128CR1500
Size	L1433*W130*H47mm
AC Input	AC220-240V
Input Power	37W-44W-52W
Current	250mA-300mA-350mA
Lumens Output	5180Lm-6160Lm-7280Lm
CCT	3/4/6000K
lumen Efficiency	140LM/W
LED	SMD3030(Two-Tone)
Number of LED	200
Driver	TRIDONIC
Ra	80/90
SDCM	<3
Frequency	50/60Hz
Output Voltage	DC84-200V
Power Factor	>0.9
THD	<20%
Power Efficiency	>90%
Operating Temperature	-20°C-45°C
Storage Temperature	-20°C-60°C
Operating Humidity	90%Rh or below(@-20°C-40°C)
Application Area	Indoors
Lifespan	50,000HS
Relevant	EN55015,EN61347-1




Modle NO	GLM-PLS-EL1500	GLM-PLS-EL1500DA	GLM-PLS-EL1500S	GLM-PLS-EL1500P
Size	Electrical box- Tridonic Driver	Electrical box- BOKE DALI Driver	Philips driver+ Sensor box	Tridonic driver +Indirect light+suspension wire

Light Distribution



Energy Efficiency Rating

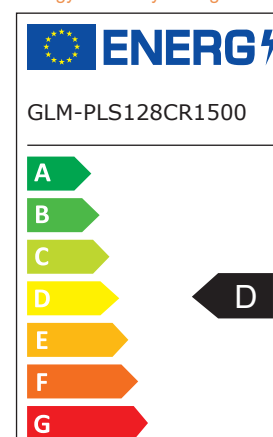

Shenzhen Gleamia Lighting

Tel: +86-755-89589529 Fax: +86-755-89507460 Email: mark@gleamia.net Web: www.gleamia.net

Add: 2nd Floor, Block C, Building 1, Hisense Science & Technology Park, Longgang, Shenzhen, China