

LED Ceiling Light

GLM-PLS128PR1200

Product Features

Model	GLM-PLS128PR1200
Size	L1155*W130*H47mm
AC Input	AC220-240V
Input Power	34W-48W-58W
Current	250mA-300mA-350mA
Lumens Output	4560-6960 lm
CCT	3/4/6000K
lumen Efficiency	120LM/W
LED	SMD2835
Number of LED	320 lights+80 Backlight Lights
Driver	TRIDONIC
Ra	80/90
SDCM	<3
Frequency	50/60Hz
Output Voltage	DC50-133V
Power Factor	>0.9
THD	<20%
Power Efficiency	>90%
Operating Temperature	-20°C-45°C
Storage Temperature	-20°C-60°C
Operating Humidity	90%Rh or below(@-20°C-40°C)
Application Area	Indoors
Lifespan	50,000HS
Relevant	EN55015,EN61347-1


Description

- Hanging rope LED ceiling light polycarbonate lampshade, reflective cup, emitting light up and down.
- Double sided fast shutter, used for installing tool free lighting housings on adapters.
- The LED-SMD technology board has excellent heat dissipation performance.
- The color temperature of 3000, 4000, or 6000K can be turned on by sliding the switch
- Open the back panel.
- Lighting can be adjusted before installation.
- Ra 90
- Adjustable 34W, 48W, or 58W.
- The luminous flux of 3900-5460lm depends on the color temperature power.
- Size: L1155 * W130 * H47mm
- The protection level is IP54.
- The service life of this product is 50000 hours (L80 | B10)
- CE mark. ENEC certification.




Model NO	GLM-PLS-EL1200	GLM-PLS-EL1200DA	GLM-PLS-EL1200S	GLM-PLS-EL1200P
Size	Electrical box- Tridonic Driver	Electrical box- BOKE DALI Driver	Philips driver+ Sensor box	Tridonic driver +Indirect light+suspension wire

Light Distribution



Energy Efficiency Rating

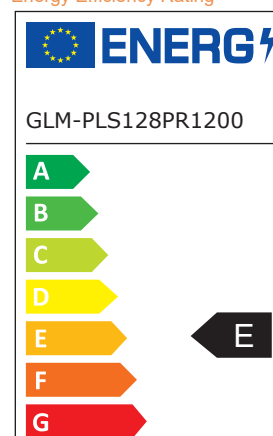

Shenzhen Gleamia Lighting

☎ Tel: +86-755-89589529 ☎ Fax: +86-755-89507460 ✉ Email: mark@gleamia.net 🌐 Web: www.gleamia.net
 📍 Add: 2nd Floor, Block C, Building 1, Hisense Science & Technology Park, Longgang, Shenzhen, China