
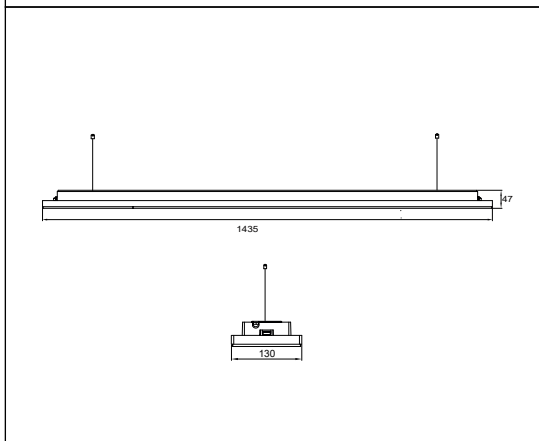


LED Ceiling Light

GLM-PLS128PR1500

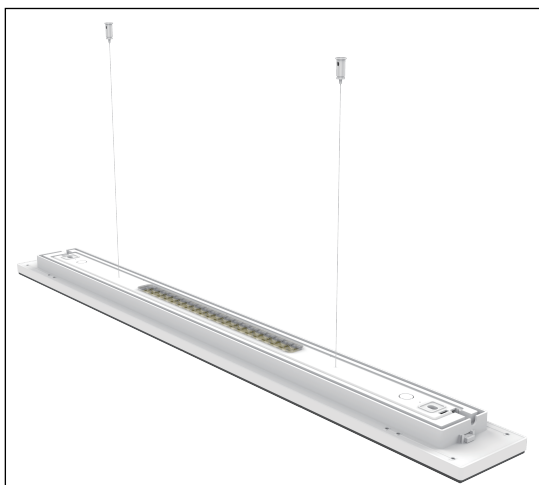

Product Features

Model	GLM-PLS128PR1500
Size	L1433*W130*H47mm
AC Input	AC220-240V
Input Power	38W-48W-58W
Current	250mA-300mA-350mA
Lumens Output	4560-6960 lm
CCT	3/4/6000K
lumen Efficiency	130LM/W
LED	SMD2835
Number of LED	400 lights+100 backlight lights
Driver	TRIDONIC
Ra	80/90
SDCM	<3
Frequency	50/60Hz
Output Voltage	DC84-200V
Power Factor	>0.9
THD	<20%
Power Efficiency	>90%
Operating Temperature	-20°C-45°C
Storage Temperature	-20°C-60°C
Operating Humidity	90%Rh or below(@-20°C-40°C)
Application Area	Indoors
Lifespan	50,000HS
Relevant	EN55015,EN61347-1


Description

- Hanging rope LED ceiling light polycarbonate lampshade, reflective cup, emitting light up and down.
- Double sided fast shutter, used for installing tool free lighting housings on adapters.
- The LED-SMD technology board has excellent heat dissipation performance.
- The color temperature of 3000, 4000, or 6000K can be turned on by sliding the switch
- Open the back panel.
- Lighting can be adjusted before installation.
- Ra 90
- Adjustable 38W, 48W, or 58W.
- The luminous flux of 4560-6960lm depends on the color temperature power.
- Size: L1433 * W130 * H47mm
- The protection level is IP54.
- The service life of this product is 50000 hours (L80 | B10)
- CE mark. ENEC certification.




Model NO	GLM-PLS-EL1500	GLM-PLS-EL1500DA	GLM-PLS-EL1500S	GLM-PLS-EL1500P
Size	Electrical box- Tridonic Driver	Electrical box- BOKE DALI Driver	Philips driver+ Sensor box	Tridonic driver +Indirect light+suspension wire

Light Distribution



Energy Efficiency Rating

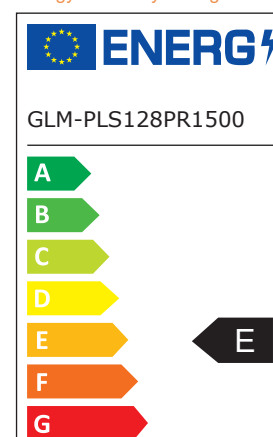

Shenzhen Gleamia Lighting

☎ Tel:+86-755-89589529 ☎ Fax:+86-755-89507460 ✉ Email:mark@gleamia.net 🌐 Web:www.gleamia.net
 📍 Add:2nd Floor,Block C,Building 1,Hisense Science & Technology Park,Longgang, Shenzhen,China