


## Ceiling ,Wall Luminaires

### GLM-DOS260DA

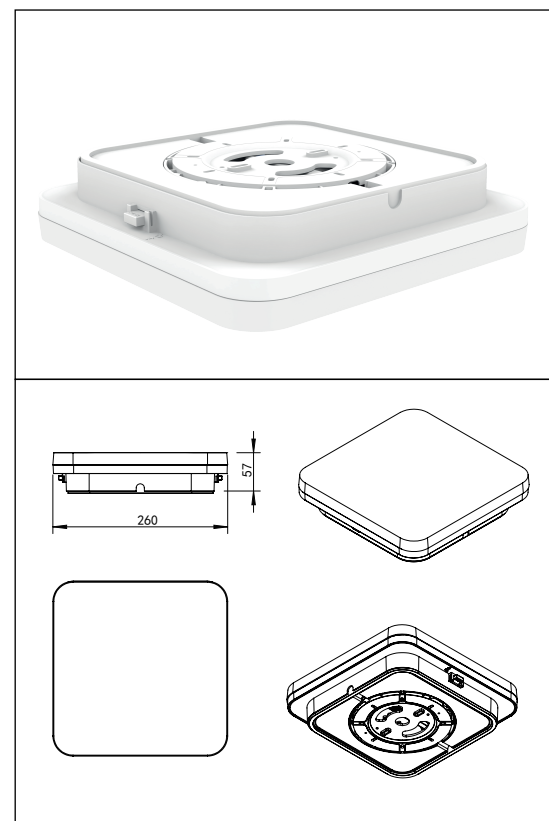


#### Description

- Square LED wall lights and polycarbonate lampshades for ceiling lights,
- A simple lamp installation adapter can be installed on walls or ceilings.
- Double sided fast shutter, suitable for tool free illumination housing installation
- On the adapter.
- LED-SMD technology on metal core board has good heat dissipation performance
- The color temperature of 3000K or 4000K or 6000K can be adjusted by sliding
- Before installation, turn on the back of the light.
- Ra 90 color reproduction.
- Adjustable to 8 watts, 10 watts, or 15 watts.
- Pressing type terminal block, luminous flux 960-1800lm depending on color
- Temperature and power.
- Size: 260\*260 \* 57 millimeters.
- Impact strength IK10, protection level IP54.
- The service life of this product is 50000 hours (L80 | B10). CE mark.
- ENEC certification.
- Standards: EN 60598-1, EN 60598-2-1,
- EN 62471、 EN 62493、 EN 55015、 EN 61000-3-2
- EN 610-3-3, EN 61547


#### Produktmerkmale

|                       |                             |
|-----------------------|-----------------------------|
| Modle NO              | GLM-DOS260DA                |
| Size                  | L260*W260*H57mm             |
| Input Power           | 8/10/15W                    |
| Current               | 220/260/380mA               |
| lumen Efficiency      | 120LM/W                     |
| Lumens Output         | 960/1200/1800LM             |
| AC Input              | AC200-240V                  |
| LED                   | SMD2835                     |
| Number of LED         | 576                         |
| Driver                | TCI DALI                    |
| Ra                    | 80/90                       |
| CCT                   | 3/4/6000K                   |
| SDCM                  | <3                          |
| Frequency             | 50/60Hz                     |
| Output Voltage        | DC3-50V                     |
| Power Factor          | >0.9                        |
| THD                   | <15%                        |
| Power Efficiency      | >87%                        |
| Operating Temperature | -20°C-45°C                  |
| Storage Temperature   | -20°C-60°C                  |
| Operating Humidity    | 90%Rh or below(@-20°C-45°C) |
| Application Area      | Indoors                     |
| Lifespan              | 50,000HS                    |
| Relevant              | EN55015,EN61347-1           |

#### Light Distribution



#### Energy Efficiency Rating

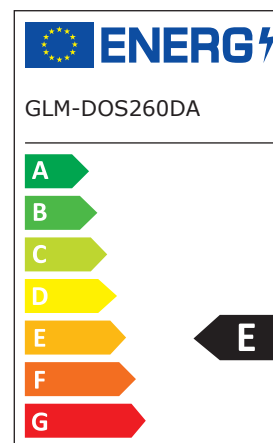

#### Shenzhen Gleamia Lighting

☎ Tel:+86-755-89589529 ☎ Fax:+86-755-89507460 ✉ Email:mark@gleamia.net 🌐 Web:www.gleamia.net  
 📍 Add:2nd Floor,Block C,Building 1,Hisense Science & Technology Park,Longgang, Shenzhen,China