


Ceiling ,Wall Luminaires

GLM-DOR300DA

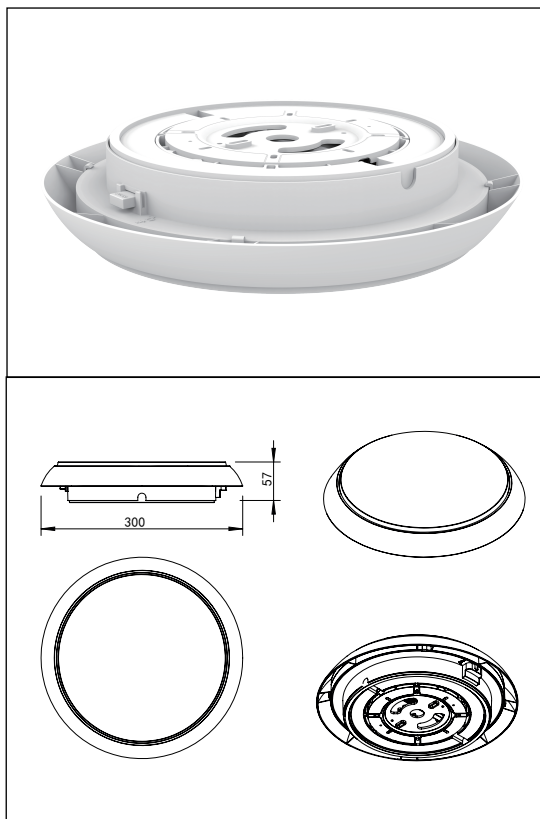


Description

- Circular LED wall lights and polycarbonate lampshades for ceiling lights,
 - A simple lamp installation adapter can be installed on walls or ceilings.
 - Double sided fast shutter, suitable for tool free illumination housing installation On the adapter.
 - LED-SMD technology on metal core board has good heat dissipation performance
 - The color temperature of 3000K or 4000K or 6000K can be adjusted by sliding Before installation, turn on the back of the light.
 - Ra 90 color reproduction.
 - Adjustable to 8 watts, 10 watts, or 15 watts.
 - Pressing type terminal block, luminous flux 960-1800lm depending on color Temperature and power.
 - Size: $\Phi 300 \times 57$ millimeters.
 - Impact strength IK10, protection level IP54.
 - The service life of this product is 50000 hours (L80 | B10). CE mark.
- ENEC certification.
- Standards: EN 60598-1, EN 60598-2-1,
- EN 62471、EN 62493、EN 55015、EN 61000-3-2
- EN 610-3-3, EN 61547


Produktmerkmale

Mode NO	GLM-DOR300DA
Size	$\Phi 300 \times 57$ mm
Input Power	8/10/15W
Current	220/260/380mA
AC Input	AC200-240V
lumen Efficiency	120LM/W
Lumens Output	960/1200/1800LM
LED	SMD2835
Number of LED	384
Driver	TCI DALI
Ra	80/90
CCT	3/4/6000K
SDCM	<3
Frequency	50/60Hz
Output Voltage	DC3-50V
Power Factor	>0.9
THD	<15%
Power Efficiency	>87%
Operating Temperature	-20°C-45°C
Storage Temperature	-20°C-60°C
Operating Humidity	90%Rh or below(@-20°C-45°C)
Application Area	Indoors
Lifespan	50,000HS
Relevant	EN55015,EN61347-1

Light Distribution



Energy Efficiency Rating

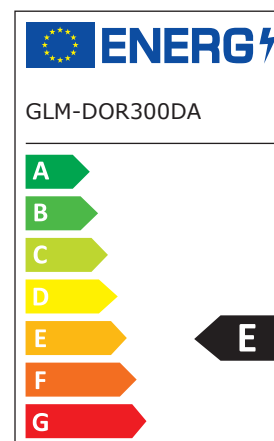

Shenzhen Gleamia Lighting

☎ Tel: +86-755-89589529 ☎ Fax: +86-755-89507460 ☎ Email: mark@gleamia.net ☎ Web: www.gleamia.net

📍 Add: 2nd Floor, Block C, Building 1, Hisense Science & Technology Park, Longgang, Shenzhen, China