


Ceiling ,Wall And
Pendant Luminaires
GLM-DOR320DA

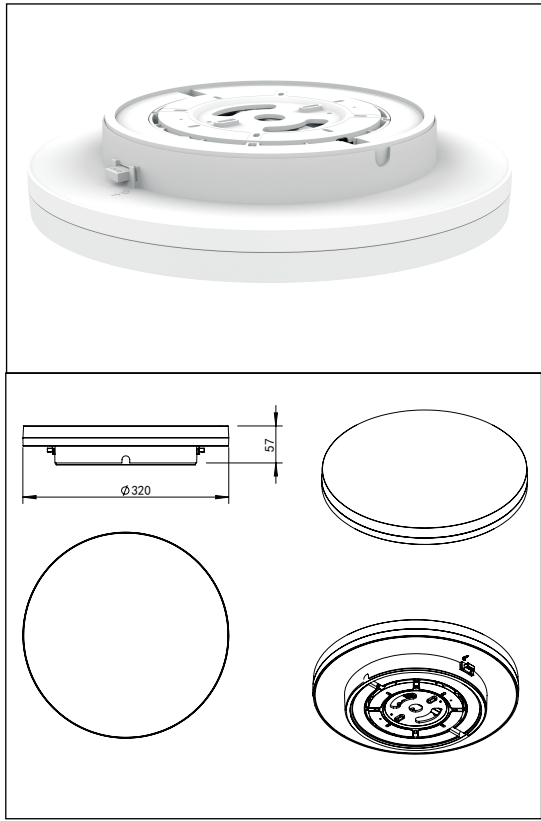


Description

- Circular LED wall lights and polycarbonate lampshades for ceiling lights,
 - A simple lamp installation adapter can be installed on walls or ceilings.
 - Double sided fast shutter, suitable for tool free illumination housing installation
- On the adapter.
- LED-SMD technology on metal core board has good heat dissipation performance
 - The color temperature of 3000K or 4000K or 6000K can be adjusted by sliding
- Before installation, turn on the back of the light.
- Ra 90 color reproduction.
 - Adjustable to 10 watts, 15 watts, or 20 watts.
 - Pressing type terminal block, luminous flux 1200-2400lm depending on color
- Temperature and power.
- Size: $\Phi 320 \times 57$ millimeters.
 - Impact strength IK10, protection level IP54.
 - The service life of this product is 50000 hours (L80 | B10). CE mark.
- ENEC certification.
- Standards: EN 60598-1, EN 60598-2-1,
 - EN 62471、 EN 62493、 EN 55015、 EN 61000-3-2
 - EN 610-3-3, EN 61547

Produktmerkmale

Modle NO	GLM-DOR320D
Size	$\Phi 320 \times 57$
Input Power	10/15/20W
Current	250/450/550mA
lumen Efficiency	120LM/W
Lumens Output	1200/1800/2400LM
AC Input	AC200-240V
LED	SMD2835
Number of LED	864
Driver	TCI DALI
Ra	80/90
CCT	3/4/6000K
SDCM	<3
Frequency	50/60Hz
Output Voltage	DC2-49V
Power Factor	>0.9
THD	<15%
Power Efficiency	>87%
Operating Temperature	-20°C-45°C
Storage Temperature	-20°C-60°C
Operating Humidity	90%Rh or below(@-20°C-45°C)
Application Area	Indoors
Lifespan	50,000HS
Relevant	EN55015,EN61347-1

Light Distribution



Energy Efficiency Rating

GLM-DOR320DA

A

B

C

D

E

F

G

E



Shenzhen Gleamia Lighting

Tel:+86-755-89589529 Fax:+86-755-89507460 Email:mark@gleamia.net Web:www.gleamia.net
Add:2nd Floor,Block C,Building 1,Hisense Science & Technology Park,Longgang, Shenzhen,China